

GP400DPEE-22


Air Operated Grease Pump

RELIABLE

PLC COMPATIBLE

Air-Operated Grease Pump for 400 lb. Size Open Head Drum

- Can pump NLGI 00 through 3 lubricating grease
- Has ram to force pump suction into grease
- Has air-operated lift to raise pump for grease drum change
- Grease output per stroke is 31.1 cc. At 30 SPM (strokes per minute), grease volume is 933 cc per minute. Max. recommended cycle rate is 60 SPM.
- Includes 8 ft. long grease outlet hose
- Includes 24 VDC EMPTY pump shutoff valve
- Includes 24 VDC outputs to PLC
- Includes 24 VDC alarm panel with LOW LEVEL and EMPTY pilot lights
- Has 22:1 boost ratio (60 p.s.i. air = 1320 p.s.i. grease)
- Includes compressed air regulators and gauges

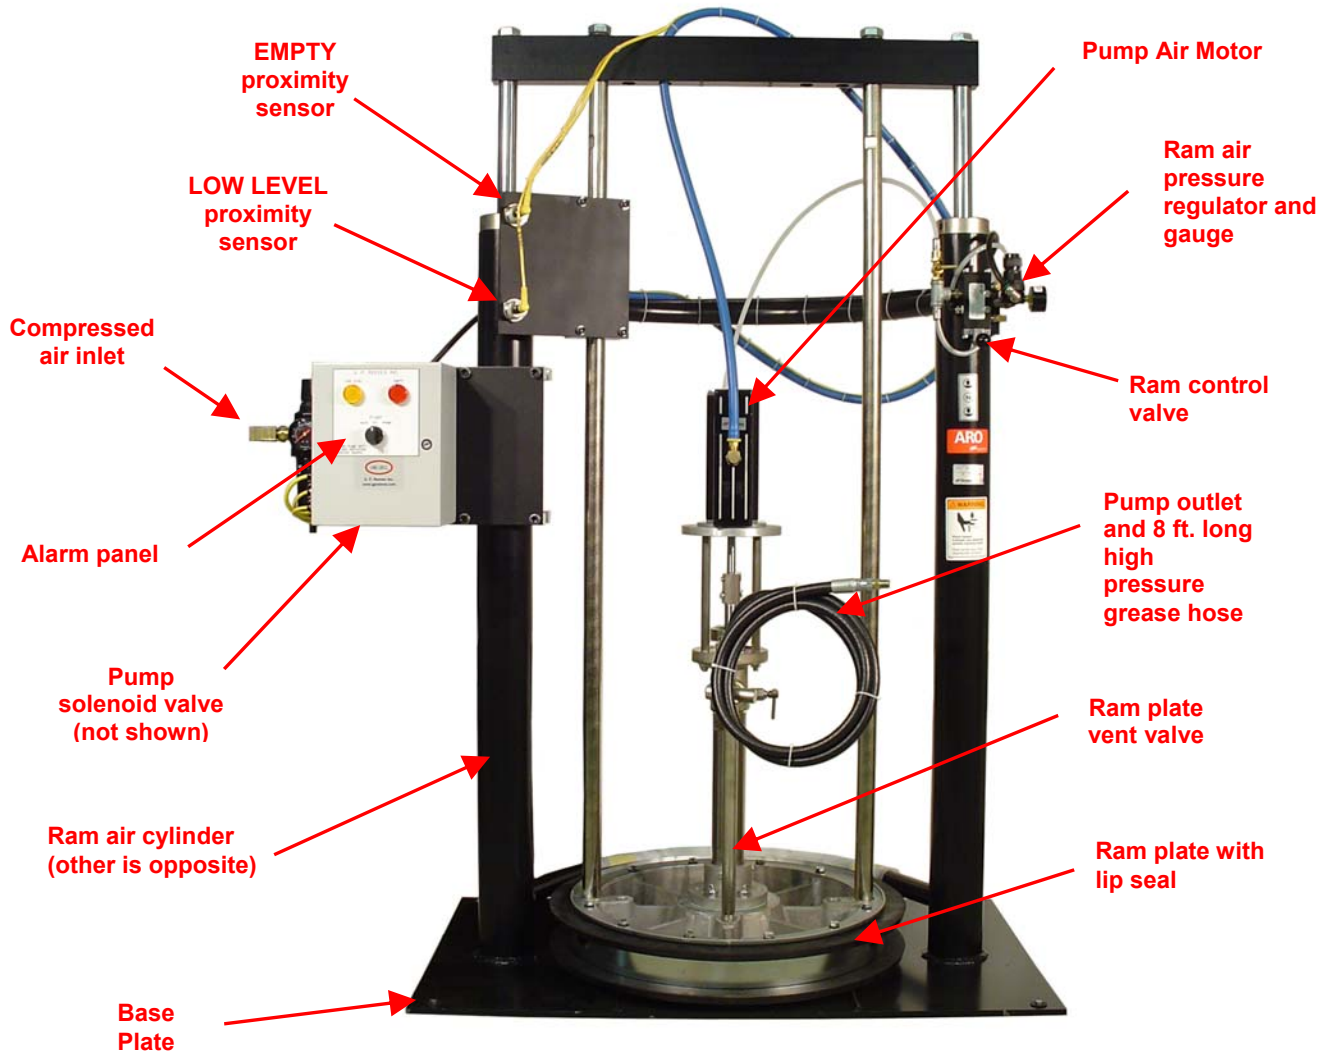

G. P. Reeves Inc. 12764 Greenly Street Holland, MI 49424

Phone: 888.399.8893

Fax: 616.399.8867

Web Site: <http://gpreeves.com>